



DS: 8-03-10
 Subject: DAB...
 SUBMERSIBLE PUMP
MODEL: RS3-DIVERTRON1200
 Distribution: ALL

PRODUCT PROFILE



DIVERTRON1200 (RS3-DIVERTRON1200)

The pump is a light and compact high head submersible clean water automatic pressure system pump supplied wired and ready to install.

It is supplied as part of RAINSAVERMK3 and is not available individually.

The pump includes an electronic automatic restart pump control with dry run protection.

The pump is characterised by:

- Corrosion resistant pump components.
- Fully automatic operation.
- Shaft seal with sand protection boot.
- 240V single phase motor with in-built auto reset thermal overload.
- 15m of power cable.
- 2 year warranty.

Liquid:

Clean water temperature range: 2 – 35 deg C


Materials:

Pump body	Noryl
Impellers (4)	Noryl with stainless steel wear ring
Diffusers (4)	Noryl with floating dry run resistant wear ring.
Pump shaft	Stainless steel
Shaft seal	Nitrile

Installation:

Maximum ambient temperature:	40 deg C
Maximum submergence	15m.
Pipe connections discharge:	1"

Performance Curve

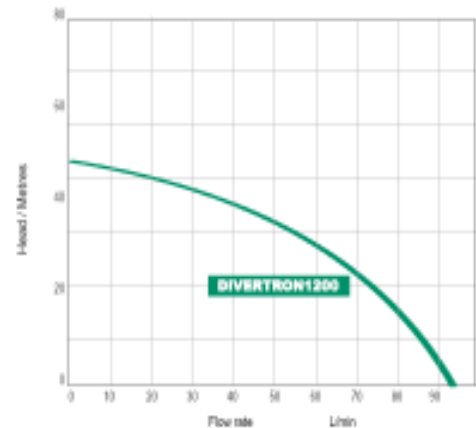

Electrical Data:

Rated voltage:	240V	Mains frequency:	50 Hz
Rated output	750W	Rated output	1100W
Current:	4.8 amps		
Motor duty:	Continuous	Motor type:	Asynchronous
Motor protection:	In-built thermal overload		
Ingress protection:	IP 68	Insulation class:	F
Power cable length:	15 m H07RNF	Net weight:	11.0 kg
Dimensions:	480mm L x 150mm H x 150mm W		

Pump Performance. Flows to 95 l/m , Heads to 46m

Only sold as Part No: RS3-DIVERTRON1200 List Price \$1200 ex.gst



Distributed by **White International Pty Ltd** A.B.N. 48 000 119 380
 52 – 60 Ashford Avenue NSW 2214 PO Box 4755 Milperra BC 1891
 Ph (02) 9783 6000 Fax (02) 9783 6001
SALES HOTLINE 1300 783 601 SALES FAXLINE 02 9783 6003